



# Araldite®

## Agomet™ Structural Adhesives

Choice of simple processing methods at room temperature

Rapid fixing and handling

Good gap-filling properties

Minimal surface preparation

Very high tensile and shear strength

Good heat resistance

Good performance over a wide temperature range

High chemical resistance

**HUNTSMAN**

## Agomet™ Adhesives

---

### Introduction

Agomet adhesives are solvent free reactive acrylic systems, i.e. the strength of the adhesive (cohesion) itself is built through chemical reaction. In 2-component types, this process is started by mixing the components thoroughly. The mixture's low initial viscosity ensures thorough spreading over the surface, an important pre-condition for final adhesion. As the reaction progresses, the viscosity increases, until the adhesive is no longer free-flowing. Once the working time of the mixture is exceeded, it can no longer be applied properly, yet the chemical reaction continues. The final strength of the bonded joint is reached after a number of hours or days, depending on the adhesive used, whereas the assembled parts can be handled earlier.

Agomet adhesives are 2-component solvent-free adhesives that harden very rapidly. Following the addition of an initiator (hardener), the components react with one another, forming a high-strength polymer network within a brief period. Varying the amount of hardener is one method of adjusting the working time of the adhesive without affecting its properties appreciably. Various application techniques can be used depending on the type of adhesive.



## Bonding with Agomet Adhesives

---

Bonding with Agomet adhesives offers a number of advantages over alternative joining methods:

- Combination of various materials with optimum utilisation of their specific properties.
- Full-surface load transfer combined with uniform tension distribution.
- Joint gaps are sealed to liquids and gases.
- No contact corrosion, due to the adhesive's insulating effect.
- No material damage, due to structure transformation by heat or stress peaks at drilled holes.
- Surface quality is maintained, discoloration and warping of parts is prevented.
- Enhanced freedom of design combined with weight-savings compared with other joining methods.

*The instructions and descriptions in this brochure are general in nature. For more comprehensive information, please consult the relevant Technical Data Sheet or your local technical sales representative.*

## Joint design/construction

The construction of the part must be such that it is well-suited to an assembly procedure, utilising the strength of the adhesive most efficiently.

Special attention must be paid to the following points:

- The bonding surface must be able to support the strength required.
- The geometry of the bonding joint must be such that the stress load applied to the adhesive is in the form of compressive, tensile and shearing forces. Peeling and non-centric tensile forces (splitting) must be avoided.
- In certain cases the adhesive may require protection from external influence.
- A highly accurate fit is needed to ensure uniform load transfer and avoid stress peaks. This also facilitates compensation of production tolerances.
- A sufficient joint thickness is required to compensate for the varying expansion behavior of bonded parts.

## Surface preparation

**Pre-treatment of the bonding surface is an important element in high quality, long-lasting adhesion to the substrate. Additional surface preparation also optimises the bonding strength.**

The simplest form of pre-treatment is to wipe off adhering particles to obtain a clean, dry surface. Removal of natural and synthetic greases, oils and preservatives is best achieved with aqueous cleansing agents or organic solvents. Care must be taken that plastic surfaces are not damaged by cleaning mediums. Time and effort involved in surface degreasing can be considerably reduced by using Agomet F-types.

- Mechanical pre-treatment by means of grinding, brushing or blasting generally serves to remove surface layers and improve roughness. Blasting may produce additional benefits by chemically modifying the surface layer.
- Due to stringent work safety requirements and considerable disposal expense, chemical etching is generally only used if other methods do not result in adherence at all or an extremely high quality is required.
- Electrical and thermal methods such as corona treatment and flame treatment are used mainly on plastic surfaces with otherwise poor adhesion.

## Agomet Adhesives Substrate Matrix

- Cold-curing
- Rapid handling
- High strength
- Gap filling
- Good heat and chemical resistance
- For industrial and craftsman applications

### Methacrylates

1 = Agomet F 300 - F 307

2 = Agomet F 310 - F 315

Example: to bond steel to ABS, products from group 2 are suitable.

Individual choice is dependant upon additional, optional characteristics.

	Aluminum	Non-ferrous metals	Stainless steel	Ferrite	Cast iron	Steel	ABS	Acrylic glass	Polycarbonate	Polyester	Polystyrene	PUR, rigid	PVC, rigid	Duroplasts	Wood	Ceramics
Aluminum	2	1	2/1	1	2	1/2	2				2	2	2		1	1
Non-ferrous metals	1	2	2/1	1			1	1/2	1/2		1/2	2			1	1
Stainless steel	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1
Ferrite	1	1	2/1	1/2		1/2	2	2	2	1/2	2	2	1/2			1
Cast iron	2		2/1		2	2	2					2			1	2
Steel	1/2		2/1	1/2	2	2	2		2	2		2		1	1	2
ABS	2	1	2/1	2	2	2	2			2			1	2	1	1
Acrylic glass		1/2	2/1	2					1/2	2	1	2		1	1	1/2
Polycarbonate		1/2	2/1	2		2		1/2	2	2	1	2	2		1	2
Polyester			2/1	1/2		2	2	2			2	2				2
Polystyrene	2	1/2	2/1	2		2		1	1	2		2		1	1	2
PUR, rigid	2	2	2/1	2	2	2		2	2	2	2	2	2		1	1
PVC, rigid	2		2/1	1/2		2	1		2			2	2	1	1	
Duroplasts			2/1			2	2	1			1		1		1	
Wood	1	1	2/1		1	2	1	1	1		1	1	1	1	1	1
Ceramics	1	1	2/1	1	2	2	1	1/2	2	2	2	1			1	1/2

## Agomet Core Range Processing Options


Resin	Hardener Options	Work Time (min)	Handling Time (min)	Full Curing (hours)	Viscosity (cps)	Gap Filling in (mm)	Lap Shear Strength (kpsi)	Special Characteristics	
<b>Mixing systems</b>	Hardener powder - 3% Hardener paste - 2-5% Hardener D - 10%	F 310	8 - 12	16 - 20	12	22,000	0.12 (3)	<del>4.35</del> 4.00	Gap filling – 10 minute work life
		F 311	20	35	24	25,000	0.12 (3)	4.35	Gap filling – 20 minute work life
		F 315	8 - 12	20	12	3,000	0.02 (0.4)	<del>4.35</del> 5.00	Transparent in thin layers (not water white)
<b>No-mix systems</b>	Hardener lacquer 2 or Hardener lacquer spray	F 300	1 - 2	2 - 4	2	<del>24,000</del> 20,000	0.02 (0.4)	3.36	Very fast – 2 minute work life
		F 305	1 - 2	2 - 4	2	4,000	0.02 (0.4)	<del>3.63</del> 3.50	Liquid – ideal for ferrites – 2 minute work life
		F 310	8 - 12	16 - 20	12	22,000	0.02 (0.4)	<del>4.35</del> 4.00	10 minute work life
		F 311	20	<del>35</del> 25	24	<del>25,000</del> 30,000	0.02 (0.4)	4.35	20 minute work life
		F 315	8 - 12	<del>20</del> 25	12	<del>3,000</del> 2,500	0.02 (0.4)	<del>4.35</del> 5.00	Transparent in thin layers
<b>A/B systems</b>	A Component	B Component	Work Time (min)	Handling Time (min)	Full Curing (hours)	Viscosity (cps)	Gap Filling in (mm)	Lap Shear Strength (kpsi)	Special Characteristics
	F 300 A	F 300 B+ 6% Hardener powder	1 - 2	2 - 4	2	24,000	0.16 (4)	3.36	Gap filling – very fast
	F 305 A	F 305 B+ 6% Hardener powder	1 - 2	2 - 4	2	4,000	0.04 (1)	<del>3.50</del> 3.63	Liquid – very fast – ideal for ferrite bonding
	F 307 A	F 307 B+ 4-6% Paste hardener	3 - 4	8	3	<del>400,000</del> 350,000	0.16 (4)	<del>3.00</del> 2.61	Low shrinkage – ideal for ferrite bonding
F 310 A	F 310 B+ 6% Hardener powder or paste	8 - 12	16 - 20	12	22,000	0.16 (4)	<del>4.00</del> 4.35	Gap filling – 10 minute work life	

Note - Hardener D would be selected for use with 10:1 ratio dispensing equipment

## Processing of Agomet™ Adhesives


### Mixing systems

The classic manual processing method for small amounts of 2-component adhesive is to stir together the components in certain proportions. For Agomet acrylic adhesives, approximately 3% hardener powder or paste is added. The hardener powder is easier to work into low-viscosity products, whereas hardener paste is preferred for high-viscosity adhesives. The mixture must be processed within the given working time.

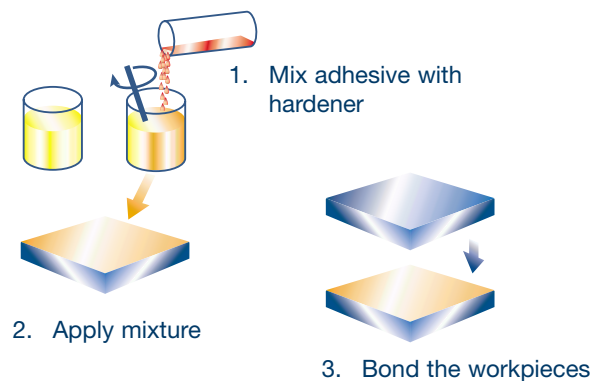

### No-mix systems

This method allows easier processing of very rapid curing methacrylate types. The **no-mix method** requires no mixing at all. The workpiece surface is pre-coated with fast-drying Agomet hardener lacquer. The dried parts can then be stored for several weeks or transported to another work-place without significant loss of reactivity. As soon as the adhesive contacts the hardener lacquer, hardening begins without any further mixing. This method can be used for joint gaps up to a maximum of 0.8 mm (with hardener lacquer application to both sides), but is not suitable for greater joint widths. Dosing, mixture and working life problems are easily avoided by using the **no-mix method** as a "1-component" processing technique. This system is suitable for bonding operations, ranging from single parts up to series production.

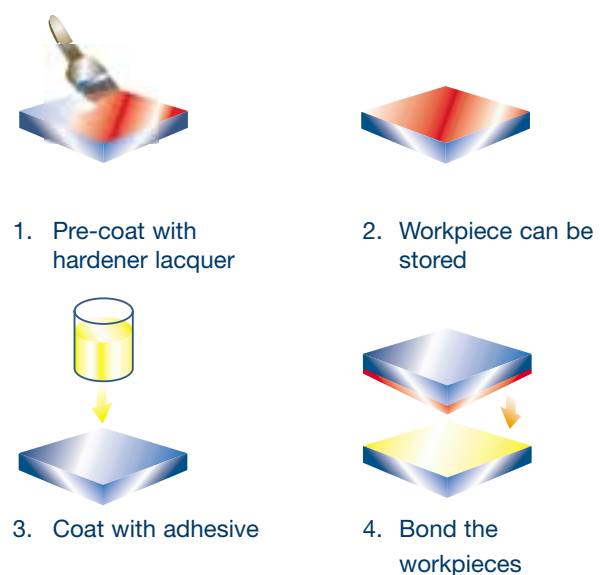


## A/B systems

A/B systems are particularly well-suited for processing large volumes of adhesive in continuous large series production as well as for using highly reactive adhesives. The adhesive components are supplied separately and are usually processed in dosing systems, or by bonding robots. Pre-mixing is unnecessary in the case of these highly reactive and relatively thin adhesives. In this case, strips of the two substances are simply placed on top of one


another (method 1) or component A is placed on one workpiece and component B on the other one (method 2). Contact at the interface of the two components during joining is then sufficient to achieve complete curing. In the case of slower curing adhesive types, mixing can also be done with a static mixer in the dosing equipment (method 3).

**Note** - hardener must be added to component B before use.


### Method 1



1. Apply component A to workpiece 1



2. Apply component B (with hardener) on top of the A-strip




3. Bond workpieces


### Method 2



1. Apply component A to workpiece 1




2. Apply component B (with hardener) to workpiece 2




3. Bond workpieces

### Method 3



1. Apply mixture of components A and B to workpiece 1



2. Bond workpieces

**IMPORTANT LEGAL NOTICE:** Sales of a referenced product ("Product") are subject to the general terms and conditions of sale of Huntsman Advanced Materials LLC and its subsidiaries ("Huntsman").

**WARRANTY:** Huntsman warrants to the Buyer that the Product will conform to the published specifications for that Product at the time of manufacture, and that the Product will be free from defects in material and workmanship in normal use.

**DISCLAIMER AND LIMITATION OF LIABILITY:** EXCEPT AS SET FORTH ABOVE, SELLER MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Huntsman cannot control Buyer's application and use of the Product and accepts no responsibility therefore. No statement or recommendation contained in any Product literature may be construed as a representation about the suitability of a Product for the particular application of Buyer or user or as an inducement to infringe any relevant patent. Buyer is responsible to ensure that its intended use of the Product does not infringe any third-party's intellectual property rights. Huntsman neither assumes, nor authorizes any representative or other person to assume for it, any obligation or liability other than as is expressly set forth herein. UNDER NO CIRCUMSTANCES SHALL HUNTSMAN BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, SPECIAL OR OTHER INDIRECT DAMAGES AS A RESULT OF A BREACH OF ANY WARRANTY OR THE FAILURE OF A PRODUCT OR ANY CLAIM THAT IS ESSENTIALLY BASED UPON SUCH BREACH OR FAILURE. Any claim by Buyer, whether arising in contract, tort, negligence, breach of warranty, strict liability, or otherwise, related to a Product shall be limited to, and the sole liability of Huntsman and the sole remedy of Buyer for any claims shall be for, the purchase price of the Product in respect of which such claim is made. The foregoing DISCLAIMER and LIMITATION OF LIABILITY supercedes Buyer's documents.

**WARNING:** Technical data and results are based upon tests under controlled laboratory conditions and must be confirmed by Buyer by testing for its intended conditions of use. The Product has not been tested for, and therefore is not recommended or suitable for, uses for which prolonged contact with mucous membranes, abraded skin, or blood is intended or likely, or for uses for which implantation within the human body is intended, and Huntsman assumes no liability for any such uses.

**HANDLING AND SAFETY PRECAUTIONS:**

**CAUTION!**

Agomet™ is potentially harmful unless certain precautions are observed. Safe handling precautions are described in detail in the current Material Safety Data Sheets and Huntsman Manual No. 24264/e *Hygienic Precautions for Handling Plastic Products of Huntsman*, which should be consulted prior to use. These publications are available on request at 800-759-7165 and should be referred to for complete information.

**Distributors**

**Vantico A&T US Inc.**

5121 San Fernando Road West  
Los Angeles, CA 90039-1071  
USA

Tel: Toll Free 800 367 8793  
Fax: +1 818 247 6616

[www.araldite.com](http://www.araldite.com)